


Retül Müve Dynamic Fit Bike Technical Specifications

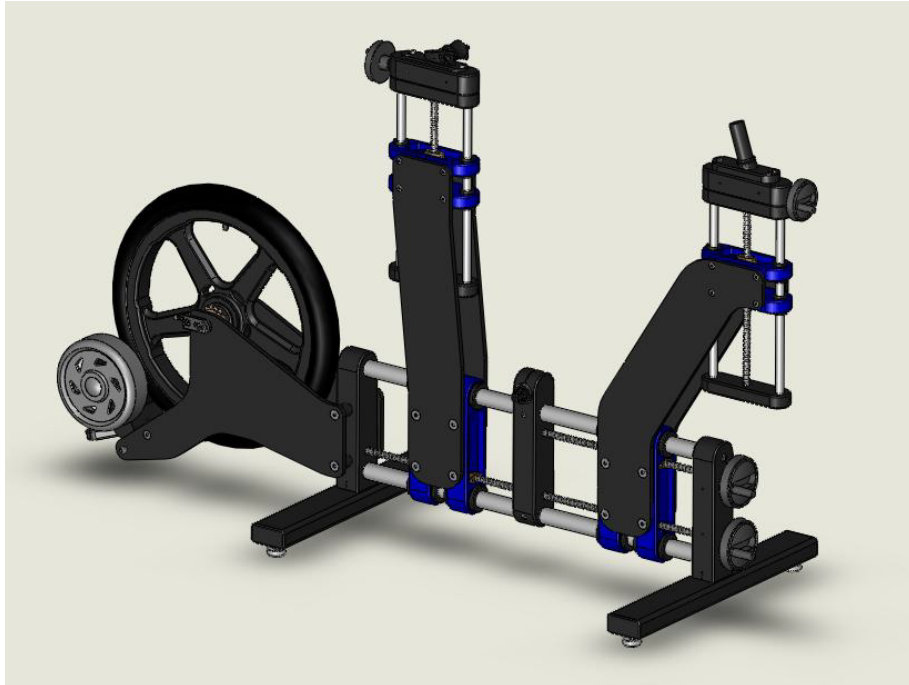

Weight is 135 lbs
Assembled Dimensions are 74 in long, 48 in tall, and 23 in wide

Travel Ranges:
All relative to bottom bracket, in millimeters

Approximate Saddle Height:
593 to 900

Headtube Center Stack and Reach:
Reach: 339 to 546
Stack: 459 to 701

Key features:

- Industrial grade linear ball bearings and shafts
- Lead screw adjustment with 2.5mm travel per turn of the hand knobs
- Configurable mounts for saddle, stem, and handlebar
- Standard English 68mm steel bottom bracket shell
- Adjustable feet

Basic bike includes:

- CycleOps Powerbeam Pro resistance unit with Joule 3.0 controller
- Rulers for quickly determining frame stack and reach
- Bulls-eye bubble level for bike leveling
- Basic saddle mount plate
- Standard 1.125" stem mount
- Extra tall saddle clamp spacer for higher saddle positions
- 20" wheel, 16T freewheel hub, tube and smooth tire along with chain, extra links and master link
- Shimano UN26 square taper bottom bracket with 113 spindle length
- Purely Custom adjustable crank with 53T chainring



Manufacturer Information:

Crucial Innovation LLC / Retül
2907 55th St #7D
Boulder, CO 80301
720-406-1171 ext 3 (technical)
tech@retul.com